



SOLID
TO SUCCEED

ROUGH TERRAIN SCISSOR LIFTS **XG1523ERT/XG1823ERT**



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

XG1523ERT/XG1823ERT



Rough terrain scissor lifts


FEATURES

PRODUCTIVITY

- Up to 700kg lift capacity
- 4 driving wheels
- 2 steering wheels
- 40% theoretical gradeability
- Outrigger leveling system
- Both platform and ground control panel with emergency stop button
- 4-wheel multi-disc brakes
- Solid rough terrain tires
- Hourmeter record
- Tilt alarm
- Lift and lower alarm
- Horn
- Axle flashing beacons
- Axle balance system
- Drive alarm

POWER

- 12V DC emergency power

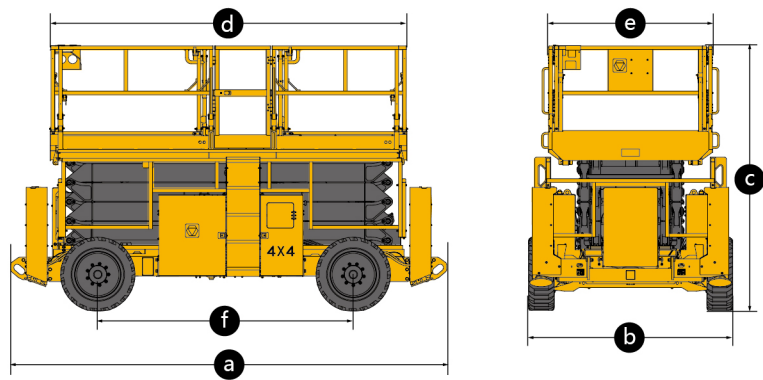

OPTIONS

- Platform working light
- AC power to the platform

Item	Unit	XG1523ERT	XG1823ERT
Lift capacity	kg	700	700
Lift capacity of auxiliary platform	kg	230	230
Occupant Capacity	-	7	4
Working height	m	15	18.1
Platform height	m	13	16.1
Length of auxiliary platform	mm	1450/1140	1450/1140
Length of platform(main & sub platform)	mm	6570	6570
Ground clearance	mm	253	253
Turning radius(inside/outside)	m	2.5/5.6	2.5/5.6
Drive Speed (retracted/extended)	km/h	5.1/1.1	5.1/1.1
Lift/Lower time	s	65/45	75/55
Gradeability	%	40	40
Tilt alarm(side/forward and backward)	°	2/3	2/3
Batteries	V/AH	48/480	48/480
Charger	V/A	48/35	48/35
Drive motor	kW	3.3	3.3
Lift motor	kW	3.1	3.1
Tires	-	33 × 12-20	33 × 12-20
Hydraulic tank	L	100	100
Weight	kg	7640	8380
a Length	mm	4860	4860
b Width	mm	2286	2286
c Height(platform folded)	mm	2950(2290)	3170(2510)
d × e Platform size (Length × Width)	mm	3980 × 1830	3980 × 1830
f Wheelbase	mm	2850	2850

SOLID TO SUCCEED