



SOLID
TO SUCCEED

ARTICULATED BOOM LIFT

XGA26K1



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

XGA26K1

Articulated boom lift

FEATURES

MEASUREMENTS

26.6m working height

PRODUCTIVITY


- 2.4m x 0.9m working platform
- 3 entry type platform with side swing doors
- 160° platform rotation
- 4-wheel drive
- Axle balance system
- Platform and chassis emergency stop
- Emergency power unit
- Axle balance pressure detection system
- 4-wheel braking system

POWER

- 12V DC emergency power
- Cold start components
- Engine air pre-filter kit
- Engine condition monitoring and start protection device
- Kubota Euro stage V emission

OPTIONS

- Tool tray
- Work light assembly
- Foam-filled rough terrain tires

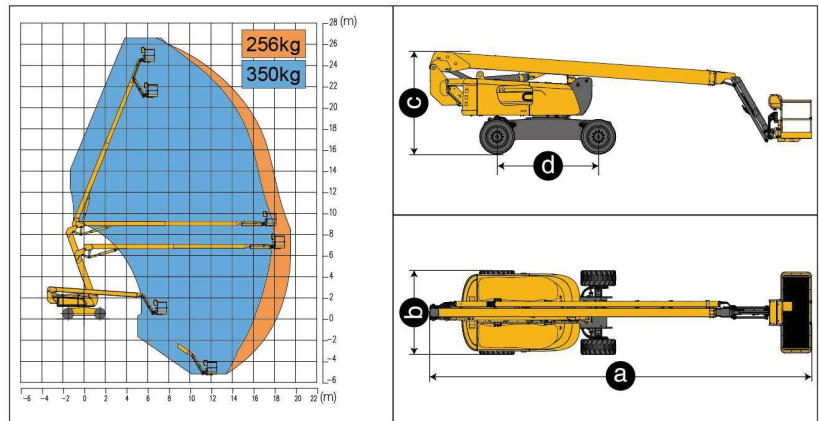

Item	Unit	XGA26K1
Working height	m	26.6
Platform height	m	24.6
Working radius	m	19.5
Lift capacity	kg	256/350
Occupant capacity	-	2
1st Boom luffing range	°	-1~+70
2nd Boom luffing range	°	-35~+68
Fly jib luffing range	°	-65~+70
Turntable rotation	°	360
Platform rotation	°	160
Drive speed (retracted/extended)	km/h	5/0.6
Turning radius (inside/outside)	m	2.2/4.4
Tailswing	mm	1330
Ground clearance	mm	380
Gradeability	%	45
Tires	-	18-625
Power source	-	Kubota V2607
Rated power	kW/(r/min)	48/(2400)
Fuel tank	L	180
Hydraulic tank	L	150
Weight	kg	18100
Platform size	mm	2400×900
a Length (transportation)	mm	11760/9900
b Width	mm	2490
c Height	mm	2950
d Wheelbase	mm	3000

SOLID TO SUCCEED